Search

Dr. Melanie Martin

CS 4480

September 13, 2010

Based on slides from

http://aima.eecs.berkeley.edu/2nd-ed/slides-ppt/

Material

- Chapter 4 Section 1 - 3
- Exclude memory-bounded heuristic search

Outline

- Best-first search
- Greedy best-first search
- A^* search
- Heuristics
- Local search algorithms
- Hill-climbing search
- Simulated annealing search
- Local beam search
- Genetic algorithms

Review: Tree search

- A search strategy is defined by picking the order of node expansion

```
function TREE-SEARCH( problem, strategy) returns a solution, or failure
    initialize the search tree using the initial state of problem
    loop do
        if there are no candidates for expansion then return failure
        choose a leaf node for expansion according to strategy
        if the node contains a goal state then return the corresponding solution
        else expand the node and add the resulting nodes to the search tree
```

Best-first search

- Idea: use an evaluation function *f(n)* for each node
  - estimate of "desirability"
  - → Expand most desirable unexpanded node

- Implementation:

  Order the nodes in fringe in decreasing order of desirability

- Special cases:
  - greedy best-first search
  - A* search

Romania with step costs in km

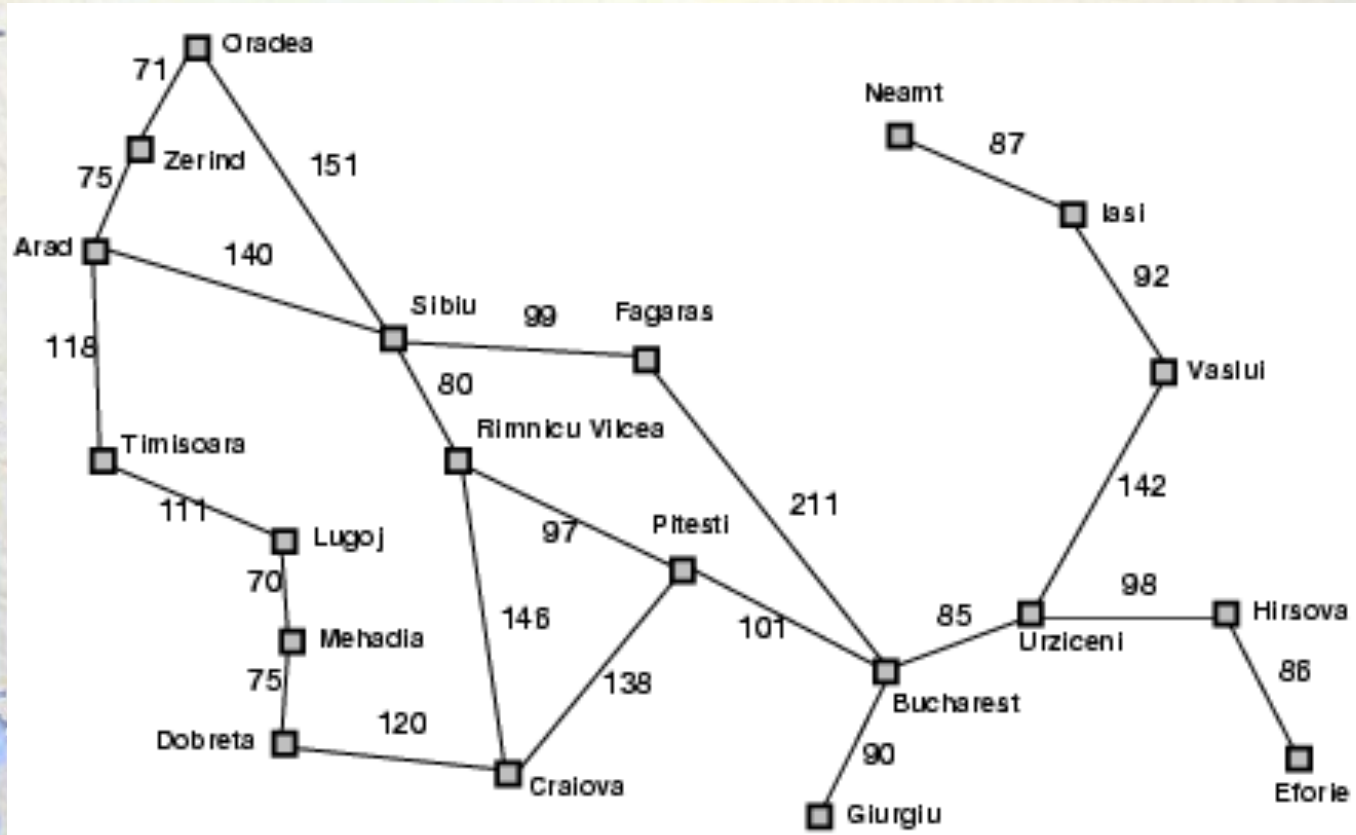

Straight–line distance to Bucharest	
Arad	366
Bucharest	0
Craiova	160
Dobreta	242
Eforie	161
Fagaras	176
Giurgiu	77
Hirsova	151
Iasi	226
Lugoj	244
Mehadia	241
Neamt	234
Oradea	380
Pitesti	10
Rimnicu Vilcea	193
Sibiu	253
Timisoara	329
Urziceni	80
Vaslui	199
Zerind	374

Greedy best-first search

- Evaluation function $f(n) = h(n)$ (heuristic)
- = estimate of cost from n to *goal*
- e.g., $h_{SLD}(n)$ = straight-line distance from n to Bucharest
- Greedy best-first search expands the node that appears to be closest to goal

Greedy best-first search example

Greedy best-first search example

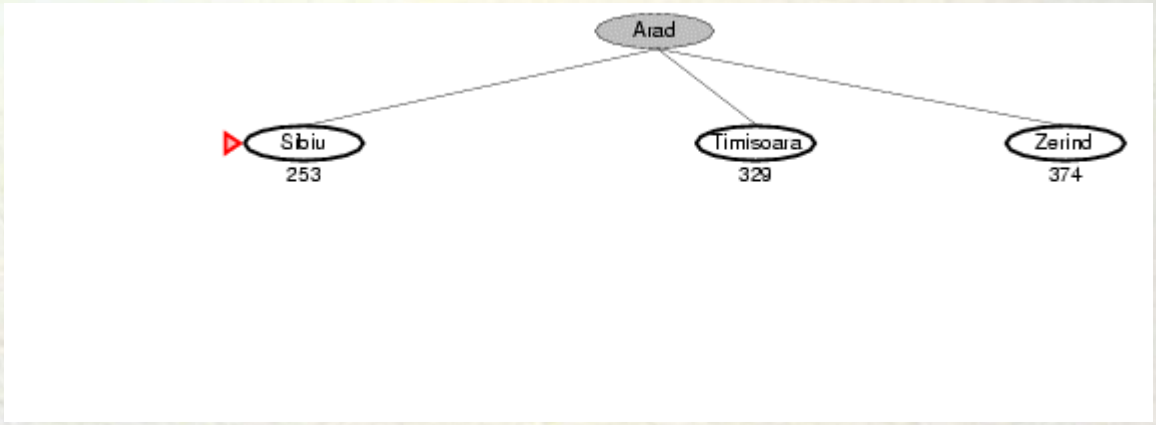

Greedy best-first search example

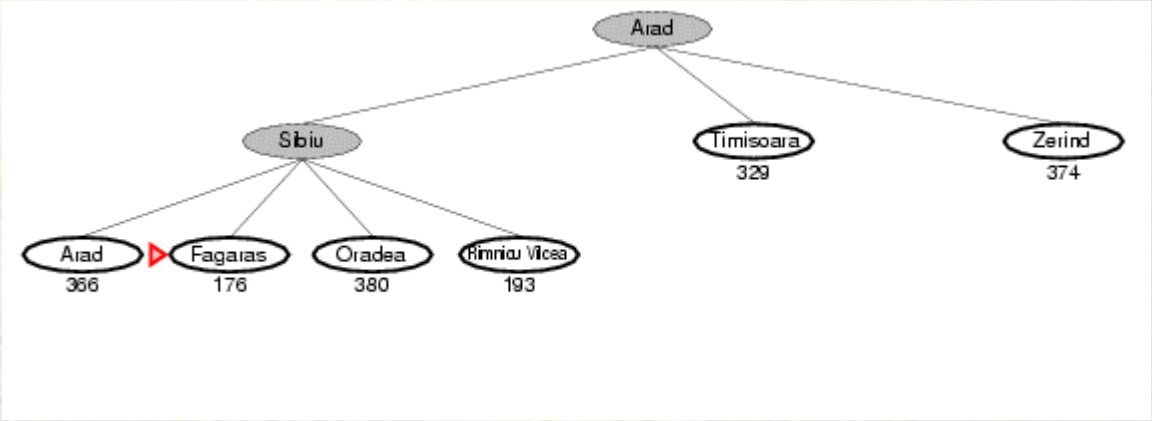

Greedy best-first search example

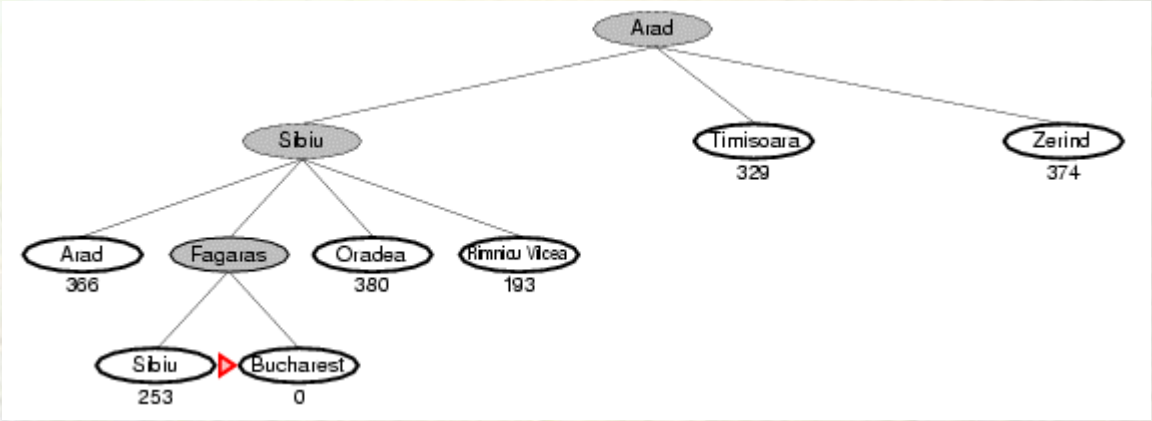

Properties of greedy best-first search

- Complete? No – can get stuck in loops, e.g., Iasi → Neamt → Iasi → Neamt →
- Time? $O(b^m)$, but a good heuristic can give dramatic improvement
- Space? $O(b^m)$ -- keeps all nodes in memory
- Optimal? No

A* search

- Idea: avoid expanding paths that are already expensive
- Evaluation function $f(n) = g(n) + h(n)$
- $g(n)$ = cost so far to reach n
- $h(n)$ = estimated cost from n to goal
- $f(n)$ = estimated total cost of path through n to goal

A* search example



A* search example

A* search example

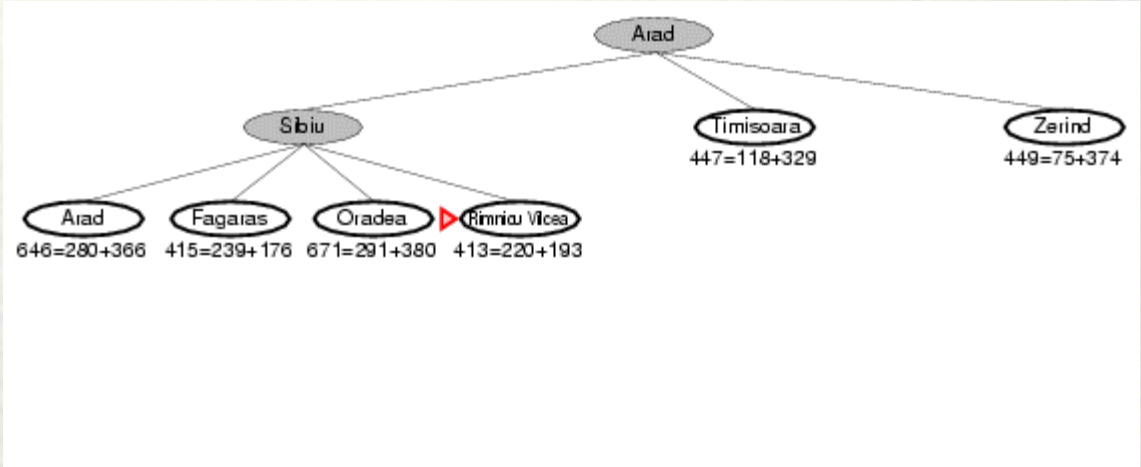

A* search example

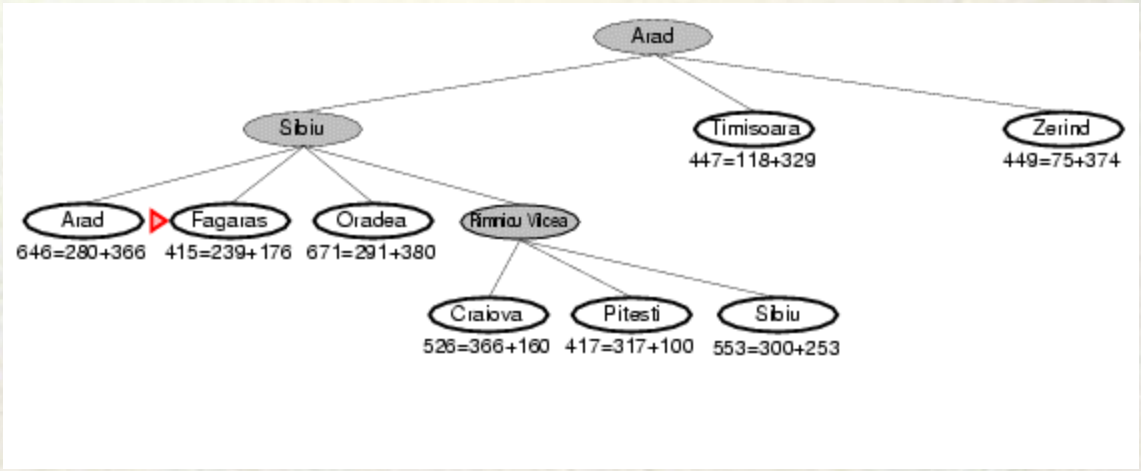

A* search example

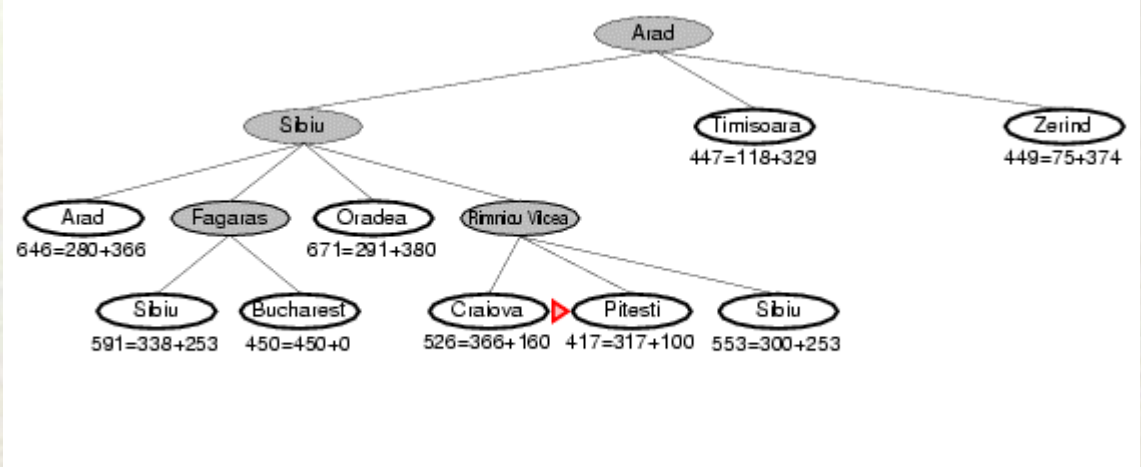

A* search example